













Introduction to Arc Flash Protection

Arc Flash


 An arc flash is the light and heat produced from an electric arc supplied with sufficient electrical energy to cause substantial damage, harm, fire, or injury.

Arc Flash Hazard

- Arc flash temperatures can reach or exceed 35,000 °F (19,400 °C) at the arc terminals. The
 massive energy released in the fault rapidly vaporizes the metal conductors involved, blasting
 molten metal and expanding plasma outward with extraordinary force.
- A typical arc flash incident can be inconsequential but could conceivably easily produce a more severe explosion. The result of the violent event can cause destruction of equipment involved, fire, and injury not only to an electrical worker but also to bystanders.

Arc Flash Accident

- According to NFPA report, 5-10 accidents happen in United States every day, and more than 2000 deaths in Arc Flash accident every year.
- Average annual electrical accidents in France are more than 125 cases. Arc flash accident accounted for 77%, permanent disability accounted for 21%, and deaths from 30 cases.







Garment description: FR Shirt and FR pants or FR Coverall.

ATPV: 4-8 cal/cm²

Hazard Level

Garment description: Cotton underwear, FR Shirt and FR pants.

ATPV: 8-25 cal/cm²



Garment description: Cotton underwear, FR shirt, pants or cotton underwear plus two FR coveralls.

ATPV: 25-40 cal/cm²



Garment description: Cotton underwear, FR shirt, FR pants, Multilayer arc flash suit.

ATPV: >40 cal/cm²

cal/cm² ----- Thermal Units

1 cal ------ 1 gram of water temperature rises to 1° C.


1cal/cm²------Equivalent to put a finger on the energy released by burning a cigarette for 1 second.

1~2cal/cm² energy can cause second degree burns.

ATPV (Arc Thermal Performance Value)
----used to characterize arc flash protection capability
of fabrics. If the energy produced from electric arc in
accident is less than ATPV of the fabric, the garment
can protect workers from second and above burns.

Sizes: (cm)

	XS	S	М	L	XL	2XL	3XL
Body Height	153-158	158-163	163-168	168-173	173-178	178-183	183-188
Sleeve Length	56	57	58	59	60	61	62
Chest Girth	112	116	120	124	128	132	136
Shoulder Breadth	44	46	48	50	52	54	56
Outseam	98	100	102	104	106	108	110
Waist Girth	78	82	86	90	94	98	102



Body Height

Selection Guide for Arc Flash Protective Garment


Lakeland Arc Flash Protective Garment is made of high standard of arc flash resistant fabric.

- Lenzing Arc Stopper (LAS) ---- LAS fabric is made of Lenzing FR fiber and aramid fiber. Lenzing FR fiber is produced from nature raw material, which offers protection against heat and flame in a variety of different applications with the features of comfort, soft, breathability and skin-friendliness. It meets the requirements of USDA and Oeko-Tex Standard 100.
- **Tecasafe Plus (TSP)----** TSP fabric is made of 48% FR-modacrylic, 37% Lyocell and 15% aramid, which offers inherent protection with the features of comfort,softness and breathability. It's tested according to ASTM F 1959 and meets the requirements of NFPA 70E.
- Indura Ultra Soft (IUS) ---- IUS fabric is made of 88% FR cotton and 12% which has high arc protective performance with the features of softness and durability. It's tested according to ASTM F 1959 and meets the requirements of NFPA 70E.

Hazard Level and Fabric Introduction

	CAT Level	Fabric Introduction	Fabric Description(OZ)	ATPV(cal/cm ²)
AR8	CAT2		7.7 oz LAS	8
AR8	CAT2		6.5 oz DH	8.9
AR8	CAT2		7.0 oz TSP	9
AR12	CAT2		9.0 oz IUS	12.4
AR16	CAT2		8.3 oz LAS	16
AR26	CAT3		6.5 oz DH+6.5 oz DH	26
AR33	CAT3		7.0 oz TSP+7.0 oz TSP	33.2
AR43	CAT4		7.0 oz TSP+7.0 oz TSP+7.0 oz TSP	43
AR48	CAT4		6.5 oz DH+6.5 oz DH+6.5 oz DH	48

Style:

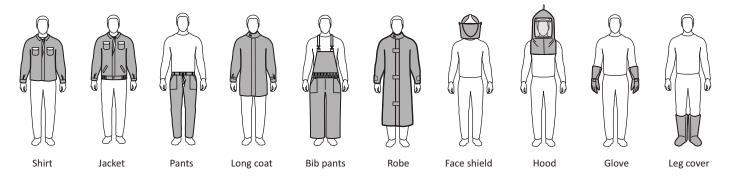

Color: Navy Royal

63





Arc Flash Protective Face Shield

- Made from high polymer and manufactured by injection molding. With helmet bracket and buckle. 8cal/cm² without mandibular protection, 10cal/cm² and 12cal/cm² with mandibular protection. Ultra-wide field of view(shield size:7.25~10"×18.5~20",thikness:0.06~0.75"). Light green, up to 60% Visible Light Transmittance.
- Harmful ultraviolet radiation can be absorbed. With anti-frog coating. Adequate facial space for head movement and neck protection.

	Product Code	ATPV	Description
	ARC-SK2-8 8cal/cm²		Without mandibular protection. With visor bracket and elastic belt.
-	ARC-S2K2-10	10cal/cm²	With mandibular protection. With visor bracket and elastic belt.
	ARC-FS-12	12cal/cm²	With mandibular protection. With visor bracket and slot adaptor.



Arc Flash Protective Hood

 Above HRC3. * Arc shield and fabric are connected by flame retardant buckle. Easy to clean. * With hanging ring on
the top for easy storage. * With helmet bracket and buckle, helmet can be assembled inside the hood. * Anti-fog
coating. * Adequate space for head movement. * Hood overlapped the coat for safety. * ATPV value is on the lower left corner of front side.

Product Code	ATPV	Description
AR26HD 25cal/cm ²		Arc shield 50cal/cm², fabric 26cal/cm²
AR33HD 33.2cal/cm ²		Arc shield 50cal/cm², fabric 33.2cal/cm²
AR43HD	43cal/cm ²	Arc shield 50cal/cm², fabric 43cal/cm²
AR48HD	48cal/cm²	Arc shield 50cal/cm², fabric 48cal/cm²



Arc Flash Protective Shirt

- Three protective levels: 8cal/cm², 8.9cal/cm², 9cal/cm². Soft, breathable and very comfortable. Two chest
- pockets, ATPV value above the left chest pocket. Resin buttons, curved hem. Suitable for spring and summer.

Product Code ATPV		Description		
AR8-S-LAS	8cal/cm ²	7.7 oz Lenzing Arc Stopper		
AR8-S-DH	8.9cal/cm ²	6.5 oz DH		
AR8-S-TSP	9cal/cm²	7.0 oz Tecasafe plus		



Arc Flash Protective Jacket

Different protective levels:

- 8cal/cm²,8.9cal/cm²,9cal/cm²,12.4cal/cm²,16cal/cm²,26cal/cm²,33.2 cal/cm².
 Sewed with Nomex.
 Double closure, covered button under outer closure.
 Hard resin zipper.
 Sandwich design on the front side.
 Two chest pockets.
 ATPV value above the left chest pocket.
 Two side pockets.
 Hem elastic design.
- Without arc induced metal accessories.

Product Code ATPV		Description	
AR8-J-LAS	8cal/cm ²	7.7 oz Lenzing Arc Stopper	
AR8-J-DH	8.9cal/cm ²	6.5 oz DH	
AR8-J-TSP	9cal/cm²	7.0 oz Tecasafe plus	
AR12-J-IUS 12.4cal/cm² AR16-J-LAS 16cal/cm² AR26-J-DH 26cal/cm² AR33-J-TSP 33.2cal/cm²		9.0 oz Indura Ultra Soft	
		8.3 oz Lenzing Arc Stopper	
		2 layers 6.5 oz DH	
		2 layers 7.0 oz Tecasafe plus	



Arc Flash Protective Pants

8cal/cm², 8.9cal/cm², 9cal/cm²,12.4cal/cm²,16cal/cm², 26cal/cm²,33.2 cal/cm². *Sewed with Nomex. • Two side pockets, two back pockets, ATPV value on the right back pocket. • Used in conjunction with Arc Flash Protective Jacket. • Without arc induced metal accessories.

Product Code	ATPV	Description
AR8-P-LAS	8cal/cm ²	7.7 oz Lenzing Arc Stopper
AR8-P-DH	8.9cal/cm ²	6.5 oz DH
AR8-P-TSP	9cal/cm ²	7.0 oz Tecasafe plus
AR12-P-IUS	12.4cal/cm ²	9.0 oz Indura Ultra Soft
AR16-P-LAS	16cal/cm ²	8.3 oz Lenzing Arc Stopper
AR26-P-DH	26cal/cm ²	2 layers 6.5 oz DH
AR33-P-TSP	33.2cal/cm²	2 layers 7.0 oz Tecasafe plus



Arc Flash Protective Robe

Different protective levels:

12.4cal/cm², 16cal/cm², 26cal/cm², 33.2cal/cm², 43cal/cm², 48cal/cm² . • 5cm wide FR velcro front closure with 3 cross Velcro for reinforcement. • Stand-up collar for better protection. • Velcro closure cuff of sleeves. • Can be used with our arc protective hood, gloves and boot covers. • No metal accessories which may induce arc flash accident.

Product Code	ATPV	Description	
AR12-R-IUS	12.4cal/cm ²	9.0 oz Indura Ultra Soft	
AR16-R-LAS	16cal/cm²	8.3 oz Lenzing Arc Stopper	
AR26-R-DH	26cal/cm²	2 layers 6.5 oz DH	
AR33-R-TSP	33.2cal/cm ²	2 layers 7.0 oz Tecasafe plus	
AR43-R-TSP	43cal/cm²	3 layers 7.0 oz Tecasafe plus	
AR48-R-DH	48cal/cm ²	3 layers 6.5 oz DH	



Long Coat Bib Pants

Arc Flash Protective Long Coat and Bib Pants Long Coat

Different protective levels:

*26cal/cm², 33.2cal/cm², 43cal/cm², 48cal/cm². *32" length for full coverage. *Stand-up collar for better protection. *FR velcro front closure. *Raglan sleeves design offers superior freedom of movement. *No metal accessories which may induce arc flash accident.

Bib Pants

Different protective levels:

- 26cal/cm², 33.2cal/cm², 43cal/cm², 48cal/cm². Bib style for comfort wearing. Adjustable loop and buckles on bib strap. • Tear drop style swing pockets hold plenty items. • Velcro leg openings with gussets make for easy on and off.
- No metal accessories which may induce arc flash accident.

Product Code				
Long Coat	Bib Pants	ATPV	Description	
AR26SC	AR26BO	26cal/cm²	2 layers 6.5 oz DH	
AR33SC	AR33BO	33.2cal/cm²	2 layers 7.0 oz Tecasafe plus	
AR43SC	AR43BO	43cal/cm²	3 layers7.0 oz Tecasafe plus	
AR48SC	AR48BO	48cal/cm²	3 layers 6.5 oz DH	

Arc Flash Protective Gloves and Leg covers

· 40cm length gloves for full coverage with sleeves. • Leg covers can be used with boots or insulated shoes. • Gloves and Leg covers can be used with coat and pants.







Leg covers

Product Code				
	Gloves	Leg covers	ATPV	Description
	AR8-G-LAS	AR8-C-LAS	8cal/cm ²	7.7 oz Lenzing Arc Stopper
	AR8-G-DH	AR8-C-DH	8.9cal/cm ²	6.5 oz DH
	AR8-G-TSP	AR8-C-TSP	9cal/cm²	7.0 oz Tecasafe plus
3	AR12-G-IUS	AR12-C-IUS	12.4cal/cm²	9.0 oz Indura Ultra Soft
	AR16-G-LAS	AR16-C-LAS	16cal/cm²	8.3 oz Lenzing Arc Stopper
	AR26-G-DH	AR26-C-DH	26cal/cm ²	2 layers 6.5 oz DH
	AR33-G-TSP	AR33-C-TSP	33.2cal/cm ²	2 layers 7.0 oz Tecasafe plus
	AR43-G-TSP	AR43-C-TSP	43cal/cm ²	3 layers7.0 oz Tecasafe plus
	AR48-G-DH	AR48-C-DH	48cal/cm ²	3 layers 6.5 oz DH

Lakeland can supply different grades of arc flash protective suits made of different fabric, which can meet the requirements of arc flash protection in different workplaces.

Fabric Recommendation

- DH: inherently FR fabric.Soft and comfortable. Excellent protection against arc flash. Low cost.
- Tecasafe Plus(TSP): inherently FR fabric.Excellent protection against arc flash.

CAT and ATPV

CAT3: 26cal/cm² (2 layers 6.5oz DH fabric) 33cal/cm² (2 layers 7.0oz TSP)

CAT4:48cal/cm² (3 layers 6.5oz DH fabric) 43cal/cm² (3 layers 7.0oz TSP)

Arc Flash Protective Hood

- Arc shield and fabric are connected by flame retardant buckle.
- Easy to clean. With hangingring on the top for easy storage.
- With helmet bracket and buckle, helmet can be assembled inside the hood.
- Anti-fog coating.
- Adequate space for head movement.
- Hood overlapped the coat for safety.
- ATPV values on the lower left corner of front side.

Long Coat

- 32" length for full coverage. Stand up collar for betterprotection.
- FR Velcro front closure.
- Raglan sleeve design offers superior freedom of movement.
- No metal accessorieswhich may induct arc flash accident.

Bib Pants

- Bib style for comfort wearing.
- · Adjustable loop andbuckles on bib strap.
- Tear drop style swing pockets hold plenty items.
- Velcro leg openings with gussets make for easy on and off.
- No metal accessories which may induct arc flash accident.

Arc Flash Protective Gloves

- 40cm length gloves for full coverage with sleeves.
- Can be used with coat.

Arc Flash Protective Leg covers

- Leg covers can be used with boots or insulated shoes.
- Can be used with pants.

Carry Bag

Arc flash protective suit can be put into the carry bag.













